

ESTD




1985

TEMPAIR®

HVAC RENTAL SOLUTIONS

STHP-4000

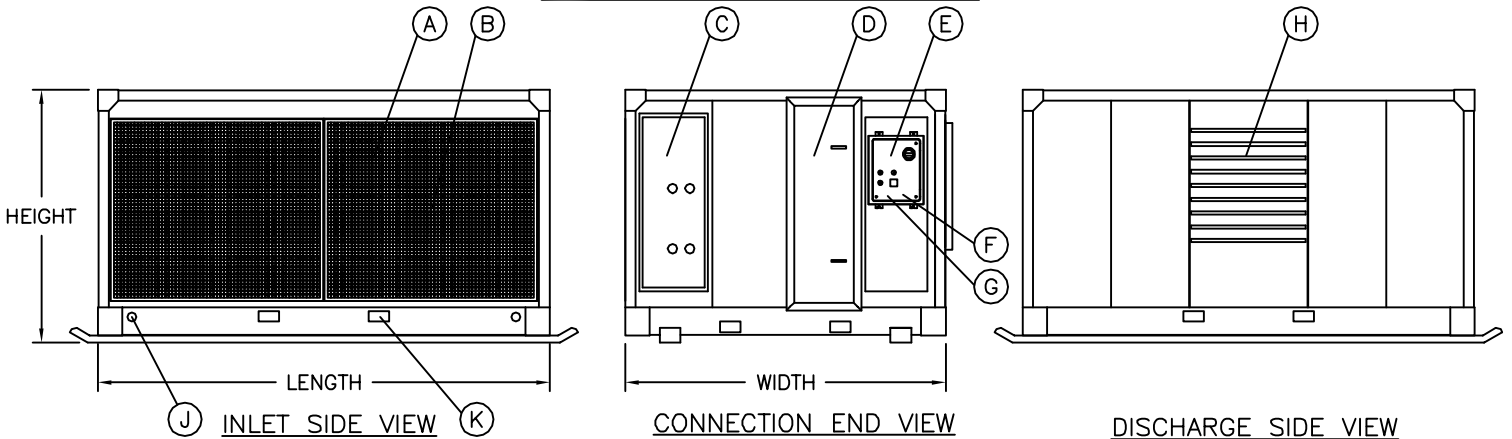

UNIT SPECIFICATIONS:

POWER SUPPLY:	208V/3PH/60HZ/60A
	230V/3PH/60HZ/60A
	460V/3PH/60HZ/30A
AIR DELIVERY:	22,000 CFM
BTU STEAM:	4000 MBH @ 0° F
PRESSURE RANGE:	10 - 150 PSIG
MAX. STEAM TEMP:	366° F
CONNECTIONS:	2-1/2" NPT

- (A) INLET SCREENS
- (B) AIR FILTERS
- (C) COIL CONNECTIONS
- (D) DAMPER & BLOWER ACCESS
- (E) CONTROL PANEL W/DISCONNECT
- (F) REMOTE THERMOSTAT CONNECTOR
- (G) POWER SUPPLY ENTRANCE
- (H) DISCHARGE DIFFUSER
- (J) CRANE LIFT POCKETS
- (K) FORK LIFT POCKETS

DIMENSIONS:

LENGTH:	147"
WIDTH:	93"
HEIGHT:	75"
WEIGHT:	2550 lb

DRAWN:	TAH	UPDATED:	JH
DATE:	9/24/09	DATE:	12/30/16